



Ambalaj Ağırlıkları (KG)

50


# Pidelik

Lavaş, lahmacun, tırnaklı pide yapımında tavsiye edilir. Hamurun yumuşak ve elastik alt yapısı sayesinde kolay işlenebilen bir ürünüdür.




## DEĞERLER

Nem (Maks.)	14,5 (%)	FFN	150
Gluten	26,5	N. Zede.	25,5
G. İndeks	85	Beyazlık	58
Sedim	30	Kül (Maks.)	0,65
B. Sedim	40	Protein (Min.)	11 (%)

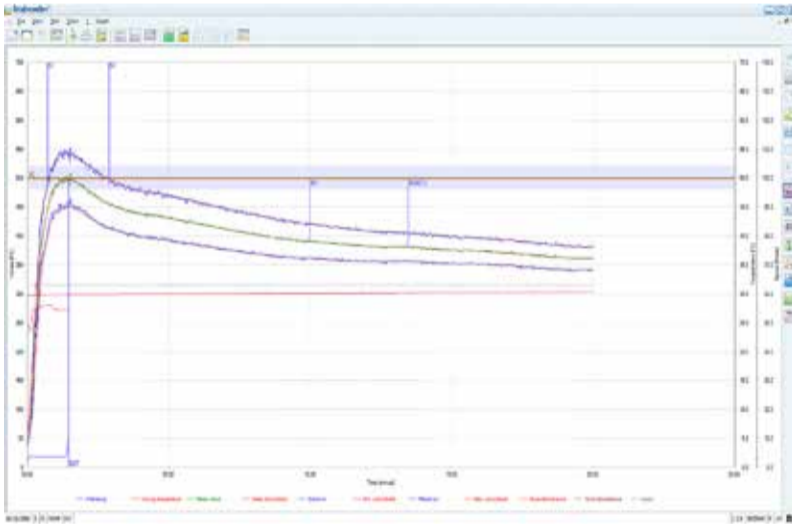

Point	Unit	Value	Description
T	mm:ss	20:01	Measuring time
DT	°C	27.3	Dosing temperature
DDT	mm:ss	01:28	Development time
C	FE	498	Consistency
WZ	%	58.1	Water absorption
WAC	%	58.1	Water absorption corr. for default consistency
WAM	%	58.8	Water absorption corr. for default moisture content
S	mm:ss	02:11	Stability
DS	FE	107	Degree of softening (10 min after beginning)
DS(ICC)	FE	118	Degree of softening (ICC / 12 min after max.)
FQN	mm	25	Farinograph quality number

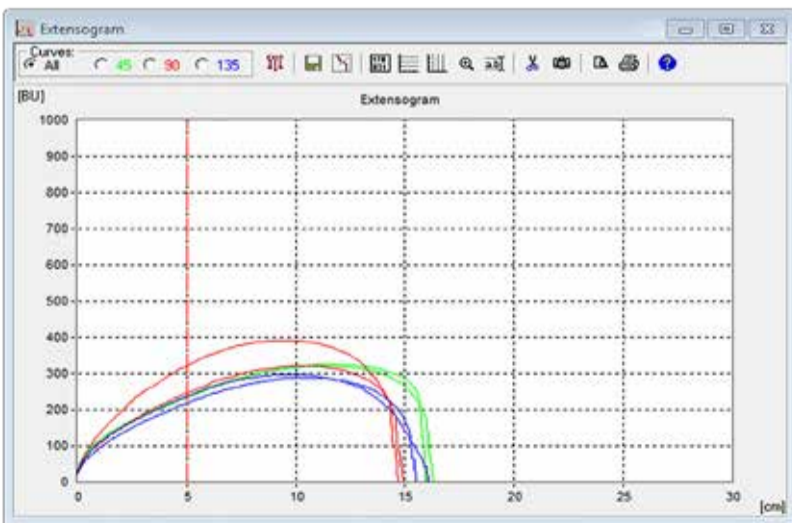

ET Evaluation			
Evaluation of sample: ELIK PİDELİK			
Date:	2016	Operator:	
Test after	45/90/135	Minutes	
Waterabsorption:	56 %		
<b>Proving Time [min]</b>	<b>45</b>	<b>90</b>	<b>135</b>
Energy [cm²]:	71	72	62
Resistance to Extension [BU]:	237	286	228
Extensibility [mm]:	161	148	158
Maximum [BU]:	325	358	293
Ratio Number:	1.5	1.9	1.4
Ratio Number (Max.):	2.0	2.4	1.9
<b>Total</b>	<b>45</b>	<b>90</b>	<b>135</b>
Remarks:			
KOZLU GIDA A.Ş			